


3

Exempel på typritningar för vägar och uppställningsplatser

Typritningar olika vägtyper




Genomsläpplig/flytande väg för att bibehålla vattenflöden

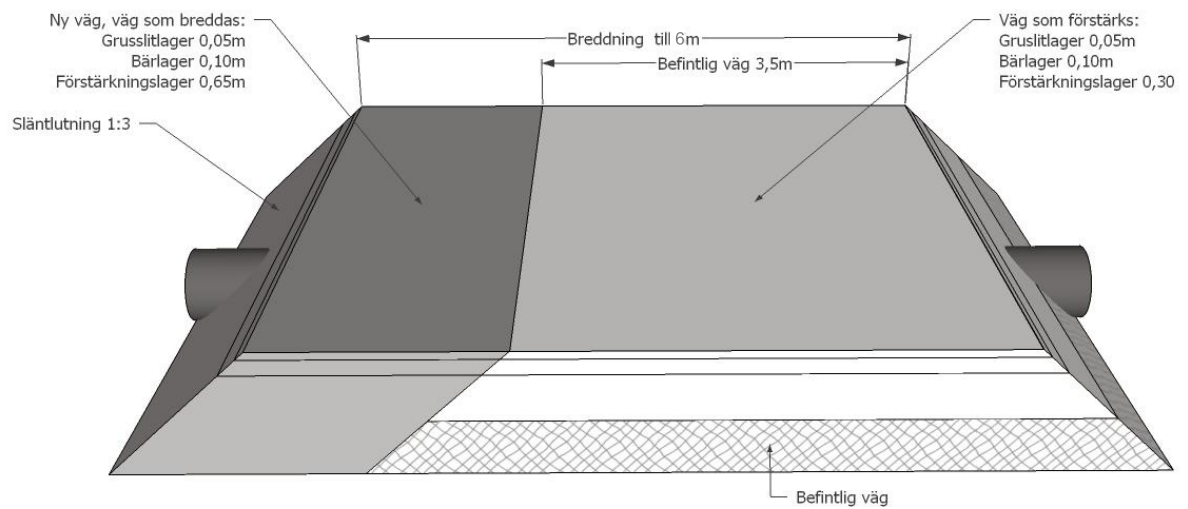

Väg med trumma för att bibehålla vattenflöde vid exempelvis våtmark

HARDSTAND. PLAN VIEW

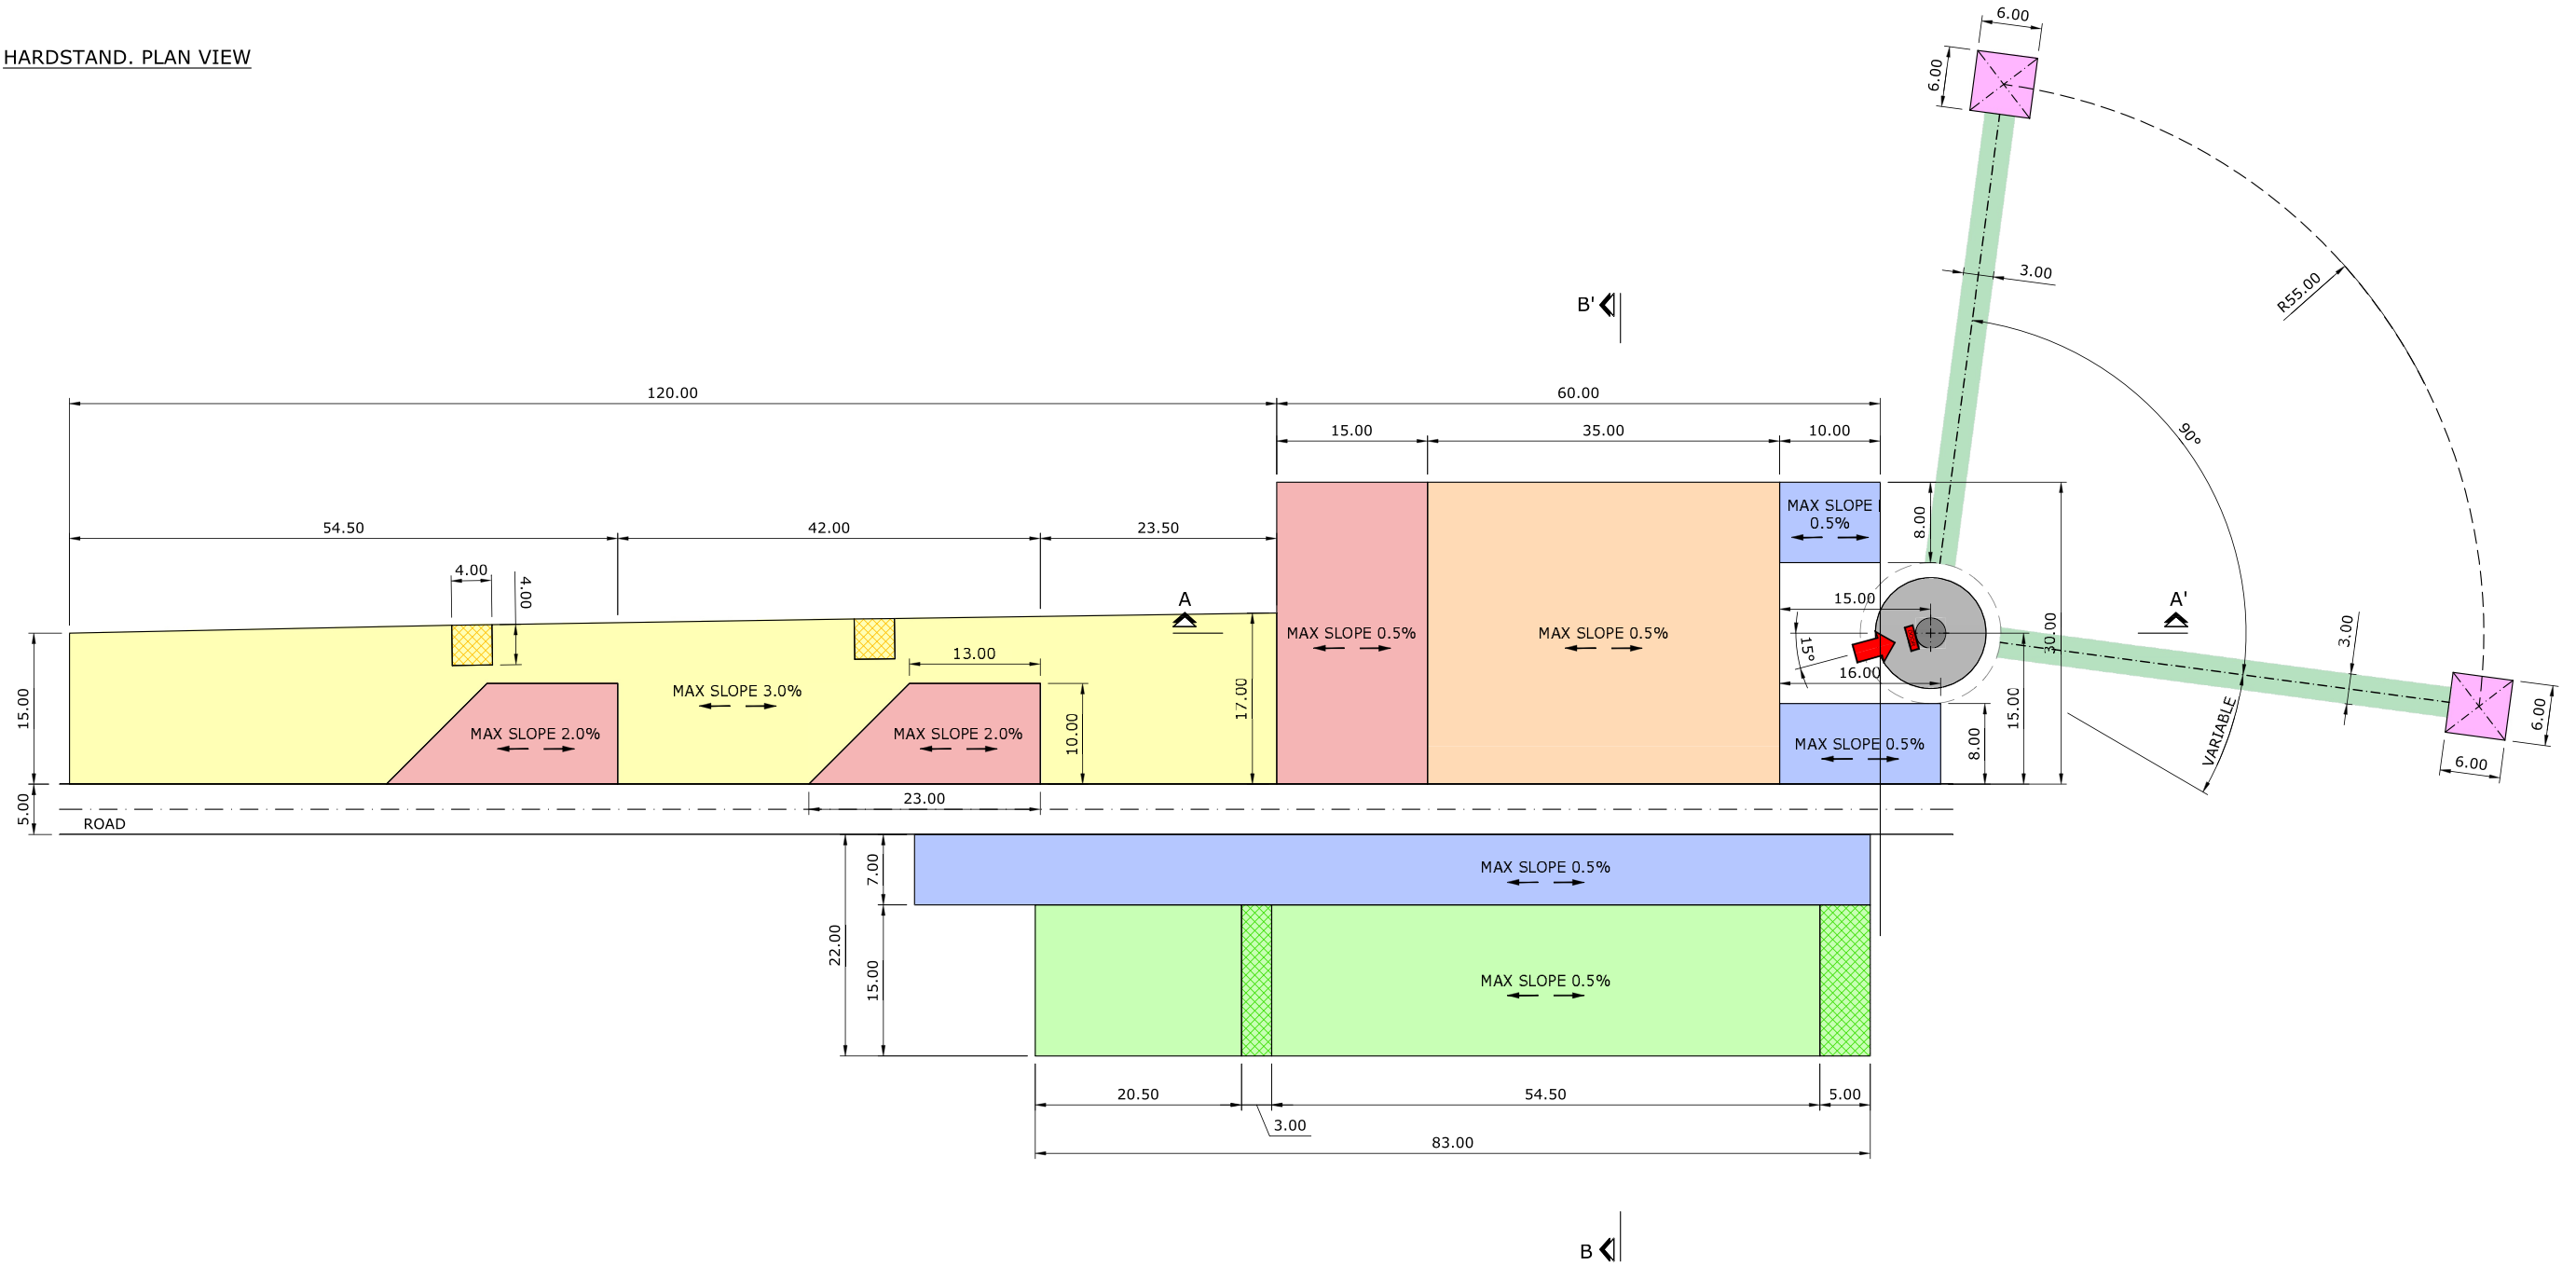

LEGEND

- HARDSTAND FOR MAIN CRANE
10 cm BASE + 40 cm SUBBASE
- HARDSTAND FOR ASSIST CRANE
10 cm BASE + 20 cm SUBBASE
- STORAGE AREA FOR COMPONENTS
10 cm BASE + 20 cm SUBBASE
- STORAGE AREA FOR BLADES
CLEARED AND LEVELLED AREA
- STORAGE AREA FOR BLADES. FINGERS
10 cm BASE + 20 cm SUBBASE
- LATTICE BOOM ASSEMBLY AREA
CLEARED AND LEVELLED AREA
- CRANE LATTICE BOOM SUPPORT
10 cm BASE + 20 cm SUBBASE
- FRICTINAL GUY ROPE TEMPORARY AREA (FGR)
10 cm BASE + 20 cm SUBBASE
- FREE OF OBSTACLES AREA

HARDSTANDS MATERIALS CHARACTERISTICS


CHARACTERISTICS	BASE	SUBBASE
Liquid limit (LL_{max})	≤ 25	≤ 30
Plasticity index (IP_{max})	≤ 6	≤ 8
CBR_{min} for 98% Modified Proctor	≥ 80	≥ 60
Sand equivalent (SE_{min})	≥ 30	≥ 30
Los Angeles Abrasion loss value (L.A.)	≤ 35	≤ 50
Organic matter content (O.M.)	< 0.2	< 0.2
7 days swelling	< 0.5	< 0.5

GENERAL NOTES:

- ALL DIMENSIONS AND LEVELS ARE IN METERS (m).
- SCALE LEVELS OF THE DRAWINGS SHOULD NOT BE TAKEN.
- ALL DIMENSIONS AND LEVELS WILL BE VERIFIED ON SITE, ANY DIVERGENCE HAS TO BE CHECKED WITH THE WORK MANAGEMENT AND THE ENGINEER IN CHARGE OF THE PROJECT.
- IT HAS BEEN CONSIDERED A TOPSOIL THICKNESS OF 30 cm IN CASE OF DETECTING HIGHER OR LOWER THICKNESSES SHOULD BE REMOVED.
- IF THERE ARE AREAS IN THE SUBGRADE WITH A VERY LOW CBR VALUE, IT SHOULD BE IMPROVED BY PLACING A GEOTEXTILE OR THE ADDITION OF A GRANULAR MATERIAL WITH GOOD CHARACTERISTICS AND PROPERLY COMPACTED IN ORDER TO REACH A MINIMUM VALUE.

REV.	DATE	DRAFTED	CHECKED	APPROVED	DESCRIPTION
01	13/02/2023	JBF	JYC	SSS	FIRST REVISION
00	19/10/2022	JRM	JYC	SSS	INITIAL VERSION

HARDSTAND CROSS SECTION. SECTION A-A'

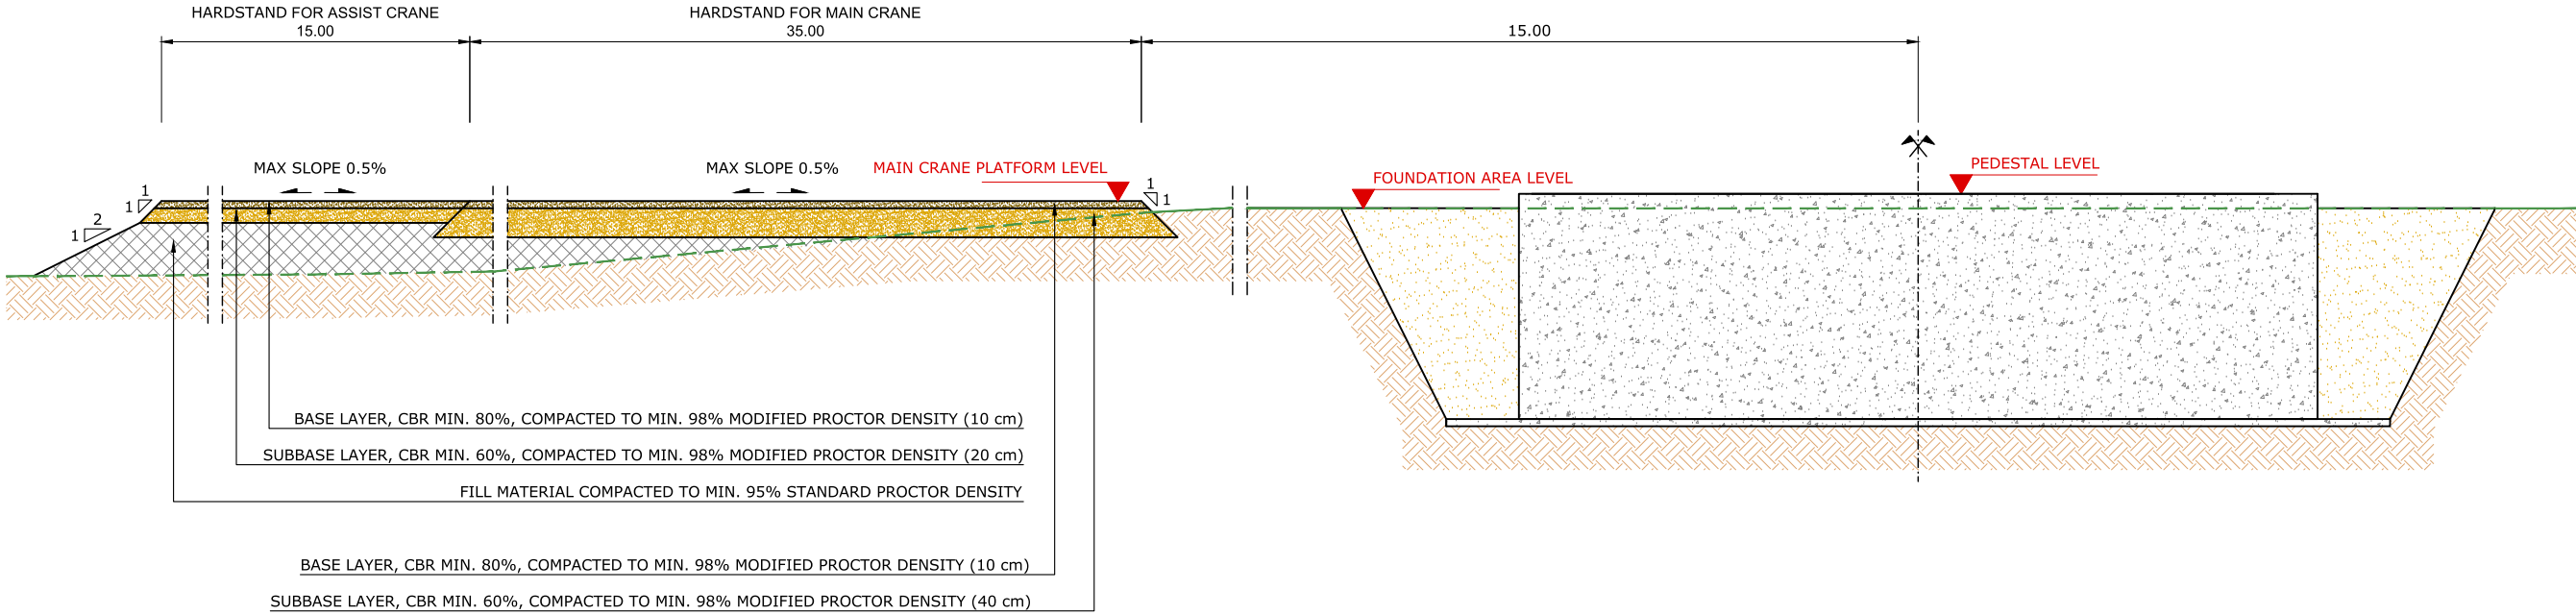

HARDSTANDS MATERIALS CHARACTERISTICS		
CHARACTERISTICS	BASE	SUBBASE
Liquid limit (LL_{max})	≤ 25	≤ 30
Plasticity index (IP_{max})	≤ 6	≤ 8
CBR_{min} for 98% Modified Proctor	≥ 80	≥ 60
Sand equivalent (SE_{min})	≥ 30	≥ 30
Los Angeles Abrasion loss value (L.A.)	≤ 35	≤ 50
Organic matter content (O.M.)	< 0.2	< 0.2
7 days swelling	< 0.5	< 0.5


WIND TURBINES LEVELS			
WIND TURBINES	FOUNDATION AREA LEVEL (m)	PEDESTAL LEVEL (m)	MAIN CRANE PLATFORM LEVEL (m)
WTG 01	373.40	373.60	373.50
WTG 02	390.00	390.20	390.10
WTG 03	389.50	389.70	389.60
WTG 04	389.95	390.15	390.05
WTG 05	384.55	384.75	384.65
WTG 06	386.95	387.15	387.05
WTG 07	400.00	400.20	400.10
WTG 08	395.00	395.20	395.10
WTG 09	403.85	404.05	403.95
WTG 10	379.90	380.10	380.00

GENERAL NOTES:


- ALL DIMENSIONS AND LEVELS ARE IN METERS (m).
- SCALE LEVELS OF THE DRAWINGS SHOULD NOT BE TAKEN.
- ALL DIMENSIONS AND LEVELS WILL BE VERIFIED ON SITE, ANY DIVERGENCE HAS TO BE CHECKED WITH THE WORK MANAGEMENT AND THE ENGINEER IN CHARGE OF THE PROJECT.
- IT HAS BEEN CONSIDERED A TOPSOIL THICKNESS OF 30 cm IN CASE OF DETECTING HIGHER OR LOWER THICKNESSES SHOULD BE REMOVED.
- IF THERE ARE AREAS IN THE SUBGRADE WITH A VERY LOW CBR VALUE, IT SHOULD BE IMPROVED BY PLACING A GEOTEXTILE OR THE ADDITION OF A GRANULAR MATERIAL WITH GOOD CHARACTERISTICS AND PROPERLY COMPACTED IN ORDER TO REACH A MINIMUM VALUE.

REV.	DATE	DRAFTED	CHECKED	APPROVED	DESCRIPTION
01	13/02/2023	JBF	JYC	SSS	FIRST REVISION
00	19/10/2022	JRM	JYC	SSS	INITIAL VERSION

HARDSTAND CROSS SECTION. SECTION B-B'

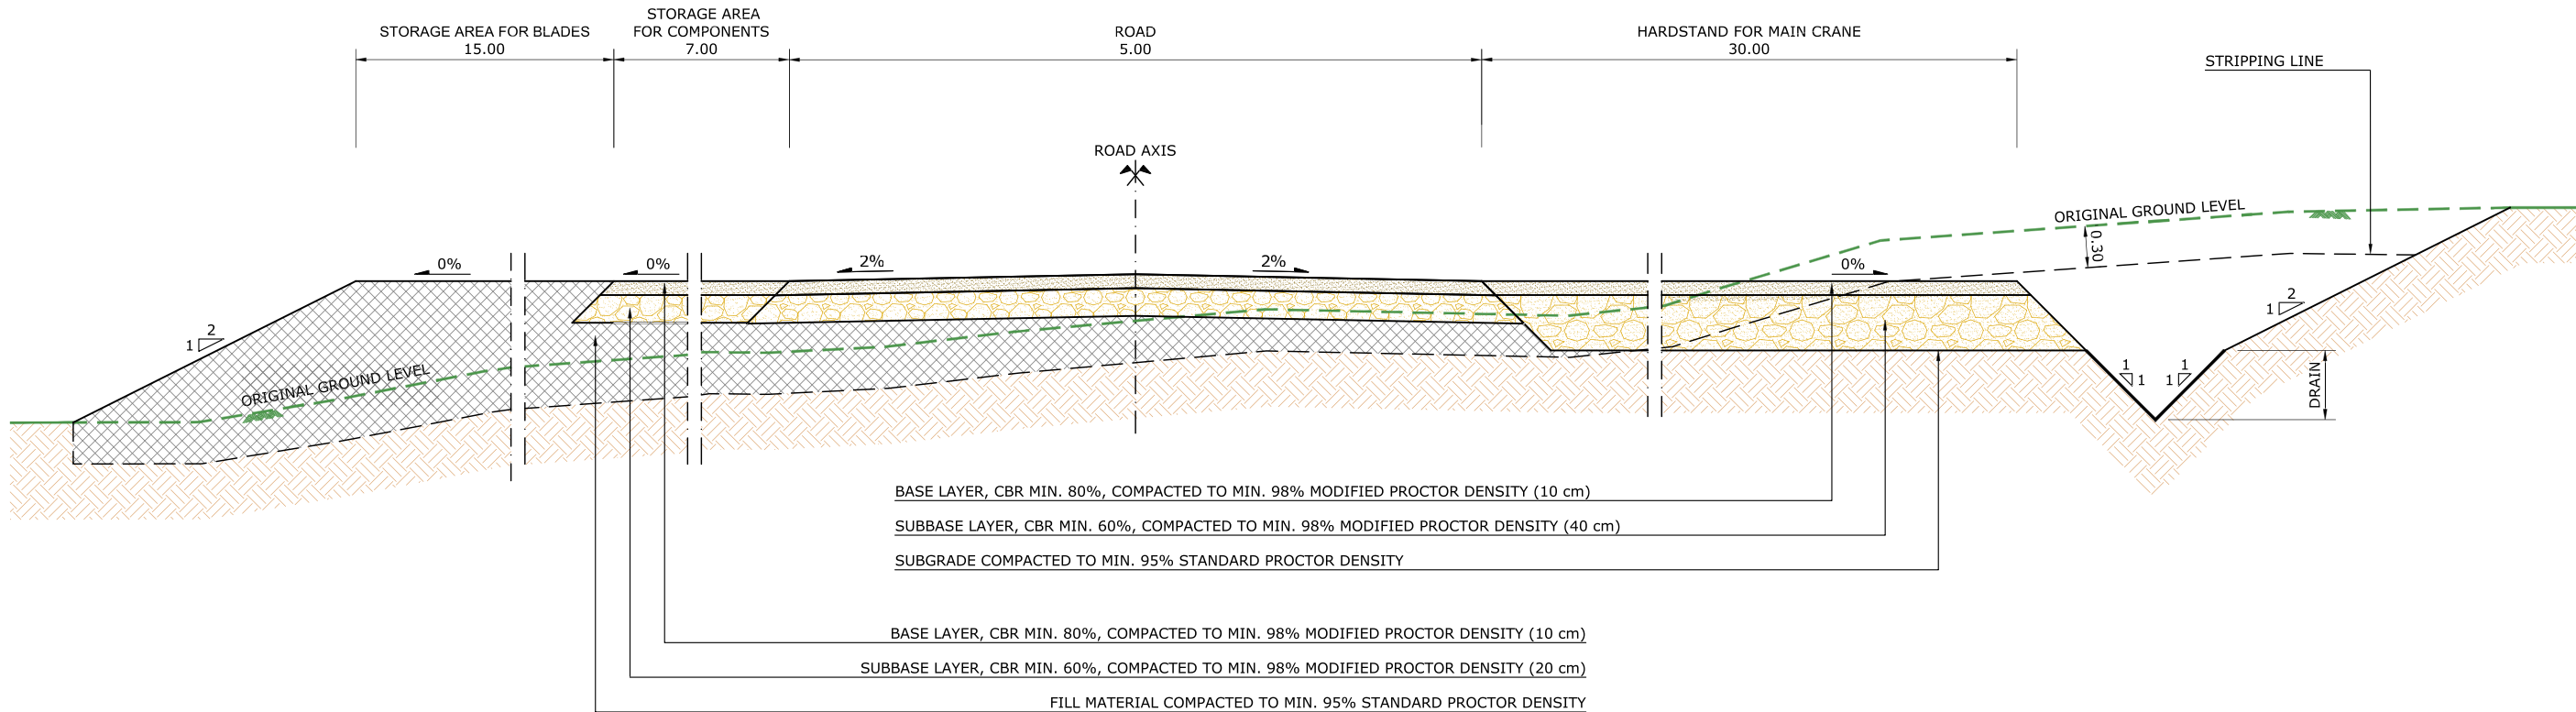

HARDSTAND. PLAN VIEW

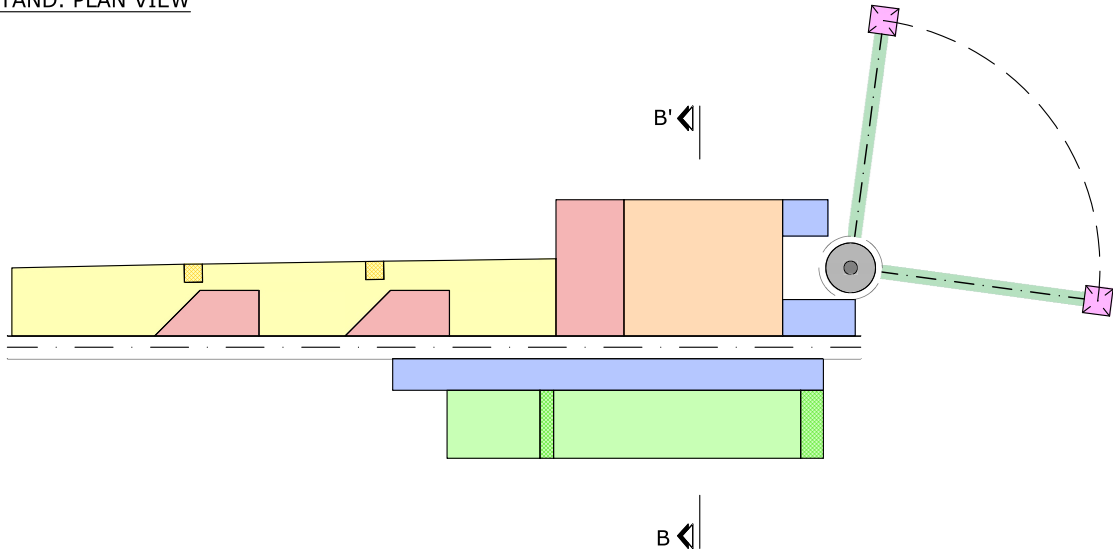

GENERAL NOTES:

- ALL DIMENSIONS AND LEVELS ARE IN METERS (m).
- SCALE LEVELS OF THE DRAWINGS SHOULD NOT BE TAKEN.
- ALL DIMENSIONS AND LEVELS WILL BE VERIFIED ON SITE, ANY DIVERGENCE HAS TO BE CHECKED WITH THE WORK MANAGEMENT AND THE ENGINEER IN CHARGE OF THE PROJECT.
- IT HAS BEEN CONSIDERED A TOPSOIL THICKNESS OF 30 cm IN CASE OF DETECTING HIGHER OR LOWER THICKNESSES SHOULD BE REMOVED.
- IF THERE ARE AREAS IN THE SUBGRADE WITH A VERY LOW CBR VALUE, IT SHOULD BE IMPROVED BY PLACING A GEOTEXTILE OR THE ADDITION OF A GRANULAR MATERIAL WITH GOOD CHARACTERISTICS AND PROPERLY COMPACTED IN ORDER TO REACH A MINIMUM VALUE.

HARDSTANDS MATERIALS CHARACTERISTICS		
CHARACTERISTICS	BASE	SUBBASE
Liquid limit (LL_{max})	≤ 25	≤ 30
Plasticity index (IP_{max})	≤ 6	≤ 8
CBR _{min} for 98% Modified Proctor	≥ 80	≥ 60
Sand equivalent (SE_{min})	≥ 30	≥ 30
Los Angeles Abrasion loss value (L.A.)	≤ 35	≤ 50
Organic matter content (O.M.)	< 0.2	< 0.2
7 days swelling	< 0.5	< 0.5

REV.	DATE	DRAFTED	CHECKED	APPROVED	DESCRIPTION
01	13/02/2023	JBF	JYC	SSS	FIRST REVISION
00	19/10/2022	JRM	JYC	SSS	INITIAL VERSION